


UTL - Residential Lifts

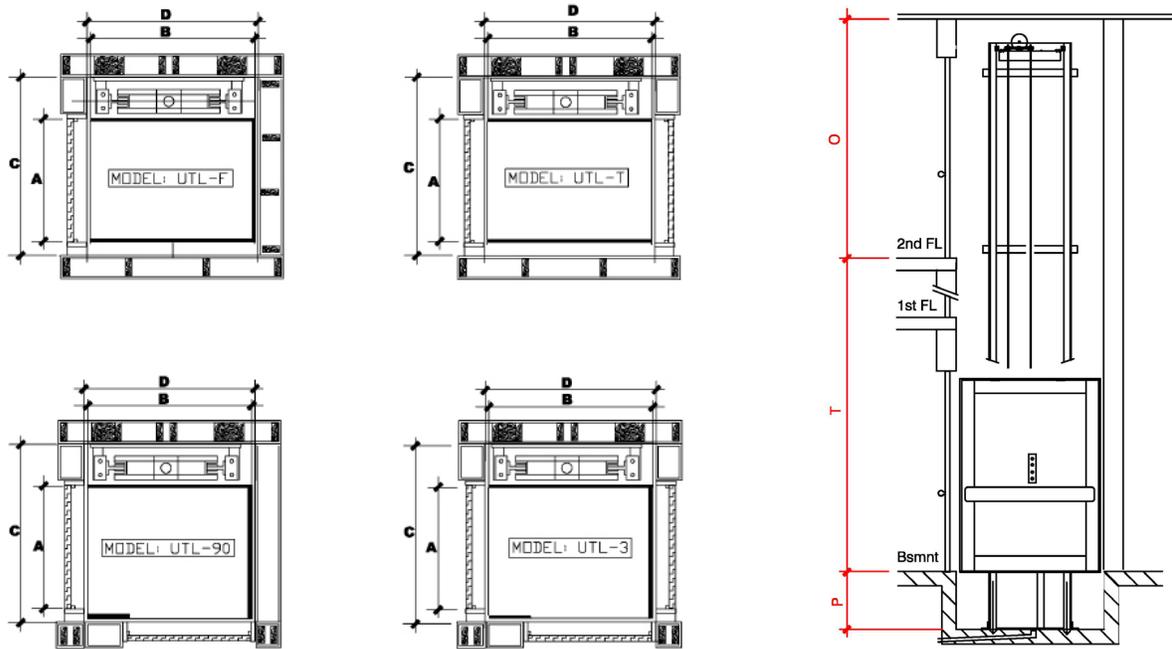

Minimum Dimensions (for all models):

A - Platform Width	36" (914 mm)	P - Pit Depth	8" (200 mm), Minimum
B - Platform Depth	48" (1220 mm)	T - Travel	50' (15 240 mm), Maximum
C - Hoistway Width	50" (1270 mm)	O - Overhead	8' (2440 mm), Minimum
D - Hoistway Depth	50" (1270 mm)		

Standard Technical Information:

Drive System:	1:2 Roped or Direct Hydraulic
Power:	220 VAC/60 Hz/1 Phase or 208 VAC/60 Hz/3 Phase
Speed:	0.15 m/s
Capacity:	340 kg to 635 kg
Machine Room:	1.5'x2'x4' Pump control unit can be up to 12 m away from shaft
Car:	- Cab size minimum of 3'x 4'x 6'8" and interior selected by owner from UT options - Optional safety light curtain
Hoistway Door:	3'x 6'8" solid swing door provided by others

*Notes - UT is able to provide custom design options specific to each project
- Dimensions are subject to modification without notification